




19-5-38
741572/38

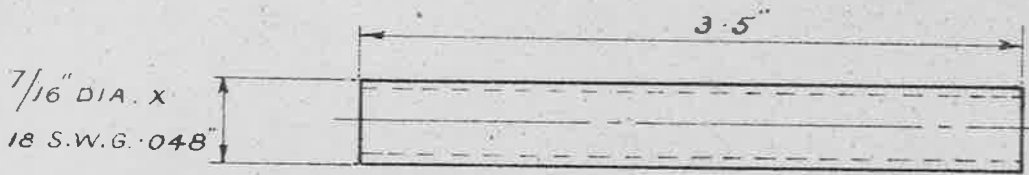


PART "A"

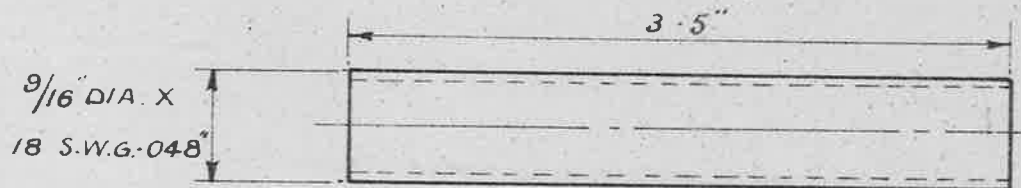

PART "B"

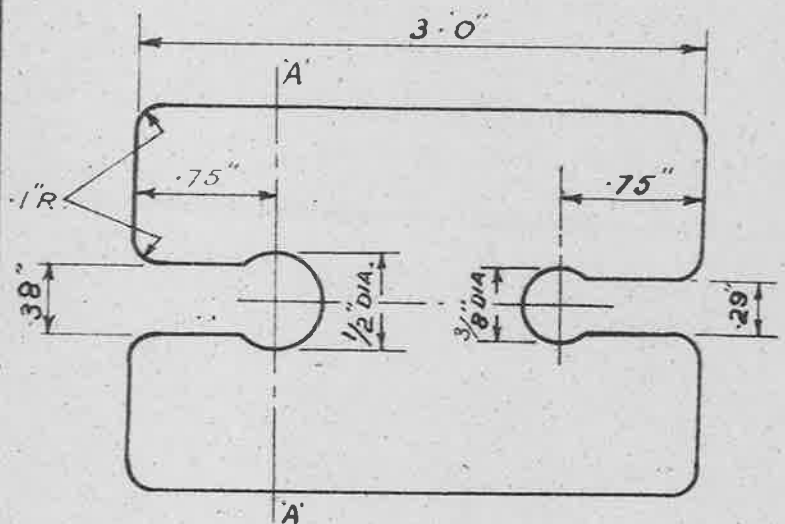


PART "C"

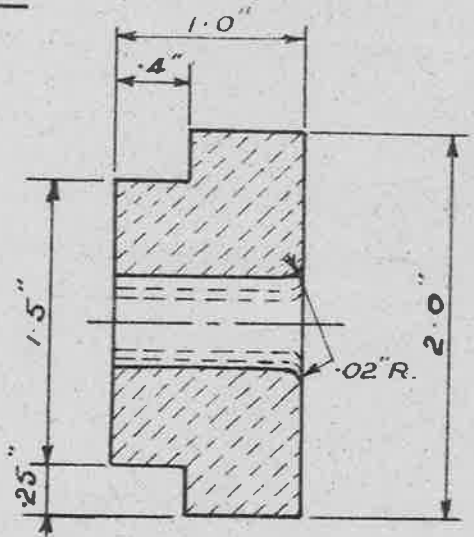

SECTION A.A.

SQUARE TANG RAGGED TO ENSURE A GOOD GRIP IN HANDLE

20 S.W.G. BRASS FERRULE.

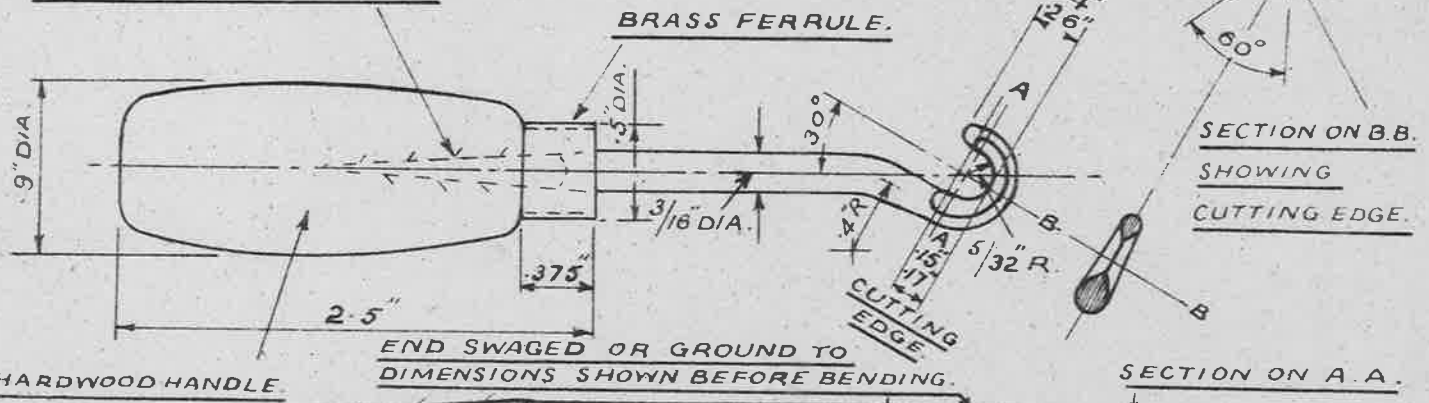

HARDWOOD HANDLE HARDEN AND TEMPER TO DARK STRAW VICKERS PYRAMID HARDNESS NUMERAL 450-500.

END SWAGED OR GROUND TO DIMENSIONS SHOWN BEFORE BENDING.

SECTION ON A.A.

PART "D"

PART	DESCRIPTION	MAT ^L	B. S. SPEC:
A	PUNCH FOR L.T.(BRAIDED CABLE) LEAD ASSEMBLING JIG.	BRASS TUBE	T.18(LATEST ISSUE)
B	PUNCH FOR H.T.(BRAIDED CABLE) LEAD ASSEMBLING JIG.	BRASS TUBE	T.18(LATEST ISSUE)
C	BODY " " " " " "	STEEL	SIPI(LATEST ISSUE)
D	HOOKED BRAIDED STRIPPING TOOL.	STEEL	S.2(LATEST ISSUE)

ISSUED BY DRAWING OFFICE DIRECTORATE OF TECHNICAL DEVELOPMENT AIR MINISTRY

TITLE— ASSEMBLING TOOLS FOR H.T. AND L.T. BRAIDED CABLE FITTINGS.

RETRACED FOR A.P.C. CHKD M.A.W. 13-11-41

DRAWN ISSUE 4 C.T. REYNOLDS

TRACED CL. 27-5-38

ISSUE No. 4
ALTERATION MOD NO AGS 153

CHECKED 27-5-38

APPROVED N. GOODGER 27-5-38