AIR MINISTRY A.G.S. No. 1514	
SHEET No. 1	No. of SHEETS 1

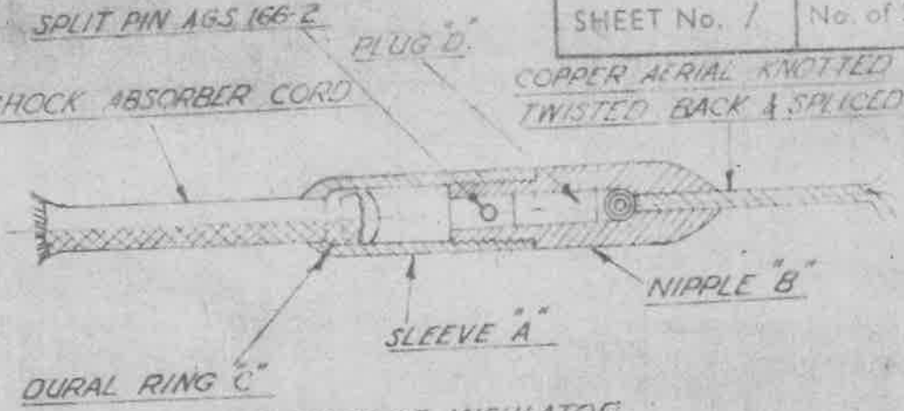

ASSEMBLY OF INSULATOR

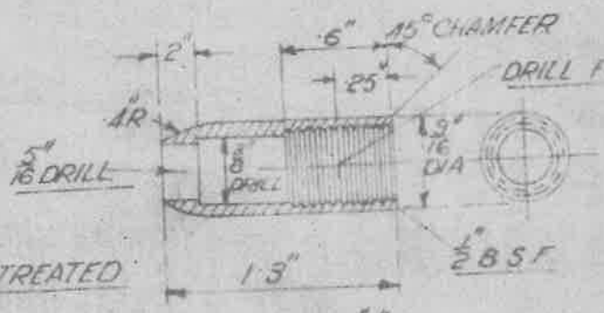

TO BE ANODICALLY TREATED

SLEEVE "A"

SPECIFICATION THE MATERIAL TO BE DURALUMIN TO BRITISH STANDARD SPECIFICATION L.1 (LATEST ISSUE) OR D.T.D 423 (LATEST ISSUE)

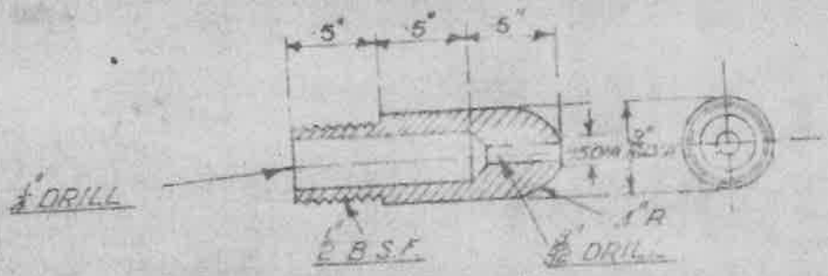

NIPPLE "B"

SPECIFICATION THE MATERIAL TO BE EBONITE TO SPECIFICATION 426/R.A.E./WT 149

TO BE ANODICALLY TREATED

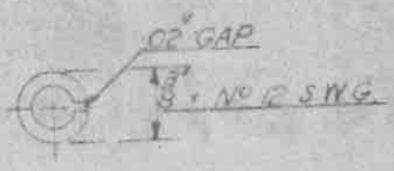

CLAMPING RING "C"

SPECIFICATION THE MATERIAL TO BE DURAL WIRE TO BRITISH STANDARD SPECIFICATION L.1 (LATEST ISSUE) OR D.T.D 423 (LATEST ISSUE)



PLUG "D"

SPECIFICATION THE MATERIAL TO BE EBONITE TO SPECIFICATION 426/RAE/WT 149

SCREW THREADS:- BRITISH STANDARD FINE (B.S.F) TO B.S. SPECN No 84 MEDIUM FIT.

ISSUED BY DRAWING OFFICE DIRECTORATE OF TECHNICAL DEVELOPMENT AIR MINISTRY	TITLE— INSULATOR FOR 5/16" SHOCK ABSORBER CORD	RETRACED FOR A.R.C. A. HOLMAN T.P.C.	DRAWN E. SPILLMAN	TRACED [illegible] 29.12.38
ISSUE No.	1 2 3 4 5 6 7 8 9 10		CHECKED N GOODALL RE CH. ESTABLE	APPROVED F.J. HOOPER
ALTERATION	GG BC 87 AGS 663 AGS/30 AGS/35 AGS 663			