


ALL TYPES OF PLUGS CORED TO GIVE MINIMUM OF .125" SECTION OF METAL.


A.G.S. 1695 SHEET 1

ALL SHARP EDGES AND BURRS TO BE REMOVED.

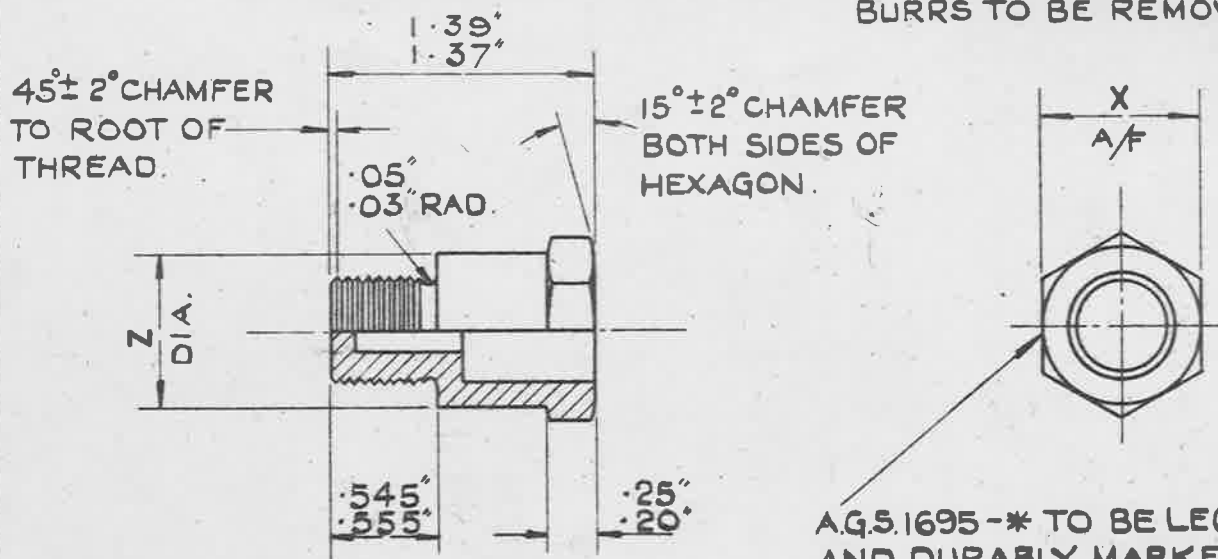

A.G.S.1695-\* TO BE LEGIBLY AND DURABLY MARKED IN POSITION SHOWN (\* MARK)

THREADS MUST BE CAPABLE OF PASSING A 'GO' GAUGE SET TO THE MAXIMUM SPARKING PLUG LIMITS.

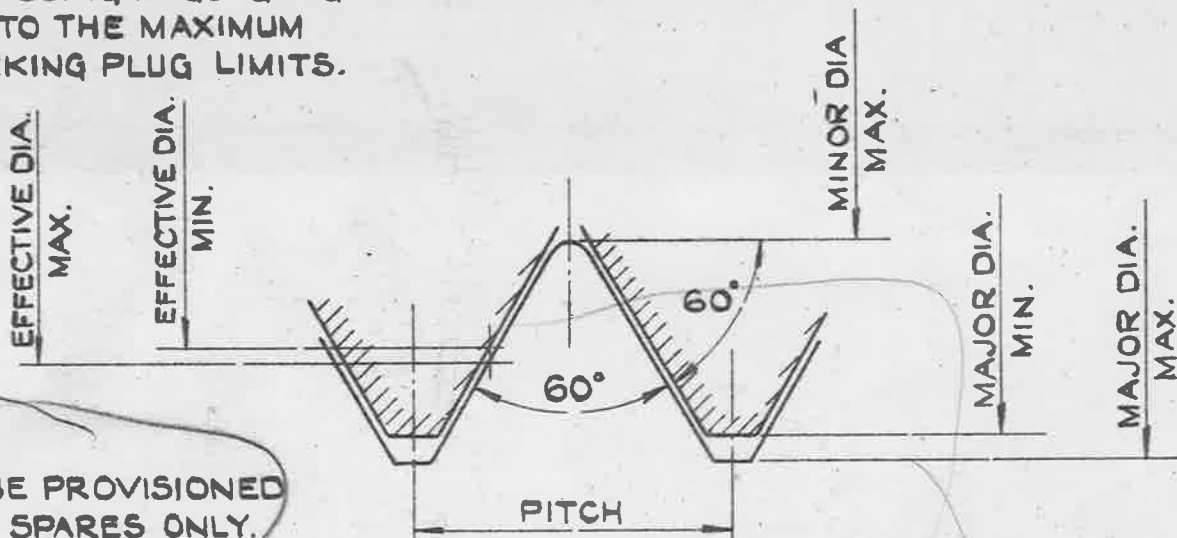

DETAILS OF THREAD

MARK	X INS.	Z INS.	NOM. DIA. M/M	PITCH M/M	MAJOR DIA. M/M		EFFECTIVE DIA. M/M		MINOR DIA. M/M	REMARKS
					MAX.	MIN.	MAX.	MIN.	MAX.	
A	.710 .705	.635 .615	12	1.25	11.908	11.734	11.096	10.922	10.149	† OBSOLESCE
B	.820 .815	.810 .790	14	1.25	13.975	13.790	13.163	13.038	12.216	
C	.920 .915	.910 .890	18	1.50	17.894	17.720	16.920	16.746	15.783	† OBSOLESCE

MATERIAL:- ALUMINIUM ALLOY TO SPEC. D.T.D. 424 OR B.S.L65 (LATEST ISSUES).  
FINISH:- ANODISE TO SPEC: D.T.D.910 (LATEST ISSUE)

SM719

TITLE:- DUMMY SPARKING PLUGS, 12, 14 & 18. M/M.

ISSUE 5  
ALT. NO. MOD/AGS 832

MINISTRY OF SUPPLY  
APPLICATIONS FOR A.G.S. SHEETS TO:-  
AT P4, BLOCK 'E', CHESSINGTON, SURREY.  
GENERAL ENQUIRIES TO:-  
A.D.S.A.E. ST. GILES COURT, 1-13  
ST. GILES HIGH STREET, LONDON WC2.

RAE APPROVAL  
SIGNATURE DATE  
*[Signature]* 2.11.53  
A.D.S.A.E. APPROVAL  
SIGNATURE DATE  
*[Signature]* 25.11.53

NUMBER OF SHEETS  
1


A.G.S. NO.  
1695  
SHEET 1

ORIGINAL APPROVAL DATE 10.5.41

**OBSOLESCE**


MARKS A & C - TO BE PROVIDED FOR SPARES ONLY  
 MARK B - SUPERSEDED BY B.S. SPEC. E.22.

ALL SHARP EDGES AND BURRS TO BE REMOVED.

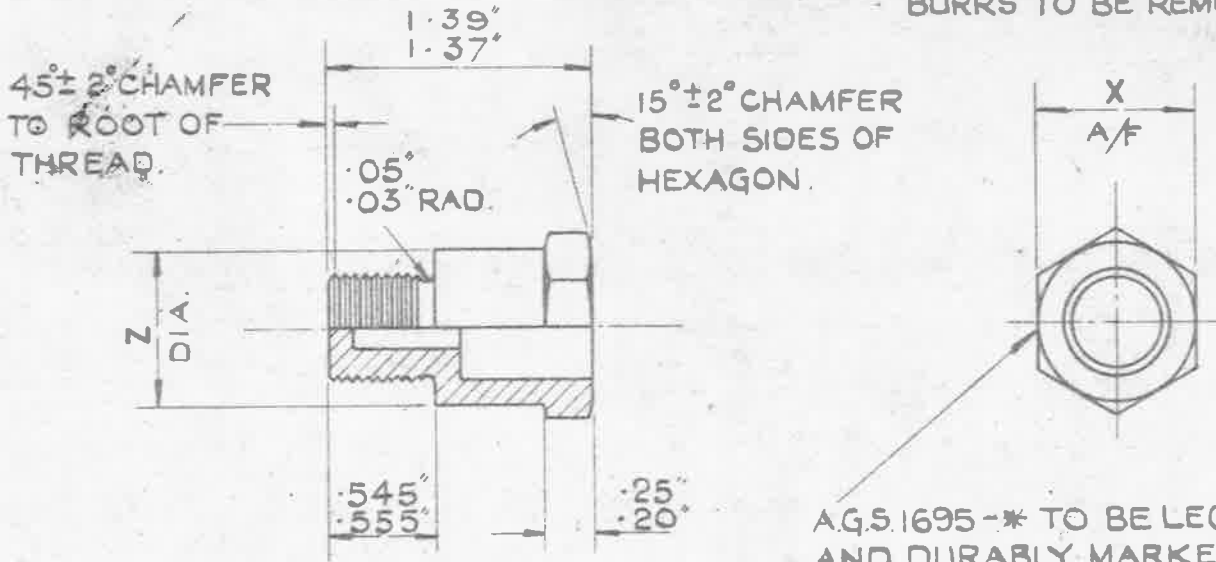

A.G.S. 1695 - \* TO BE LEGIBLY AND DURABLY MARKED IN POSITION SHOWN (\* MARK)

ALL TYPES OF PLUGS CORED TO GIVE MINIMUM OF .125\"/>

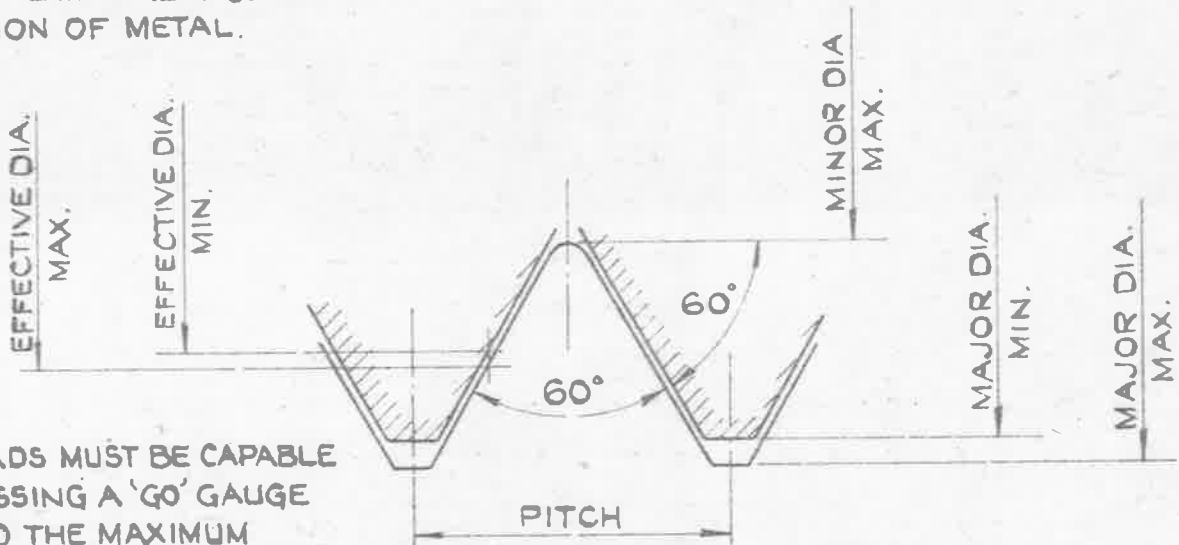

THREADS MUST BE CAPABLE OF PASSING A 'GO' GAUGE SET TO THE MAXIMUM SPARKING PLUG LIMITS

DETAILS OF THREAD

MARK	X INS.	Z INS.	NOM. DIA. $\frac{M}{M}$	PITCH $\frac{M}{M}$	MAJOR DIA. $\frac{M}{M}$		EFFECTIVE DIA. $\frac{M}{M}$		MINOR DIA. $\frac{M}{M}$	REMARKS
					MAX.	MIN.	MAX.	MIN.	MAX.	
A	.710 .705	.635 .615	12	1.25	11.908	11.734	11.096	10.922	10.149	OBSOLESCE
B	.820 .815	.810 .790	14	1.25	13.975	13.790	13.163	13.038	12.216	OBSOLESCE
C	.920 .915	.910 .890	18	1.50	17.894	17.720	16.920	16.746	15.783	OBSOLESCE

MATERIAL:- ALUMINIUM ALLOY TO SPEC. D.T.D. 424 OR B.S. L 65 (LATEST ISSUES).  
 FINISH:- ANODISE TO SPEC: D.T.D. 910 (LATEST ISSUE).

SM914

TITLE:- DUMMY SPARKING PLUGS, 12, 14 & 18.  $\frac{M}{M}$ .

ISSUE 8 6  
 ALT. NO. MOD/AGS 832 MOD/AGS 1000

MINISTRY OF SUPPLY  
 APPLICATIONS FOR A.G.S. SHEETS TO:  
 AT/P4, BLOCK 'E', CHESSINGTON, SURREY.  
 GENERAL ENQUIRIES TO:-  
 A.D.S.A.E., ST. GILES' COURT, 1-13  
 ST. GILES' HIGH STREET, LONDON W.C.2.

R.A.E. APPROVAL  
 SIGNATURE DATE  
 A.D.S.A.E. APPROVAL  
 SIGNATURE DATE

NUMBER OF SHEETS  
 1

A.G.S. No. 1695 SHEET 1