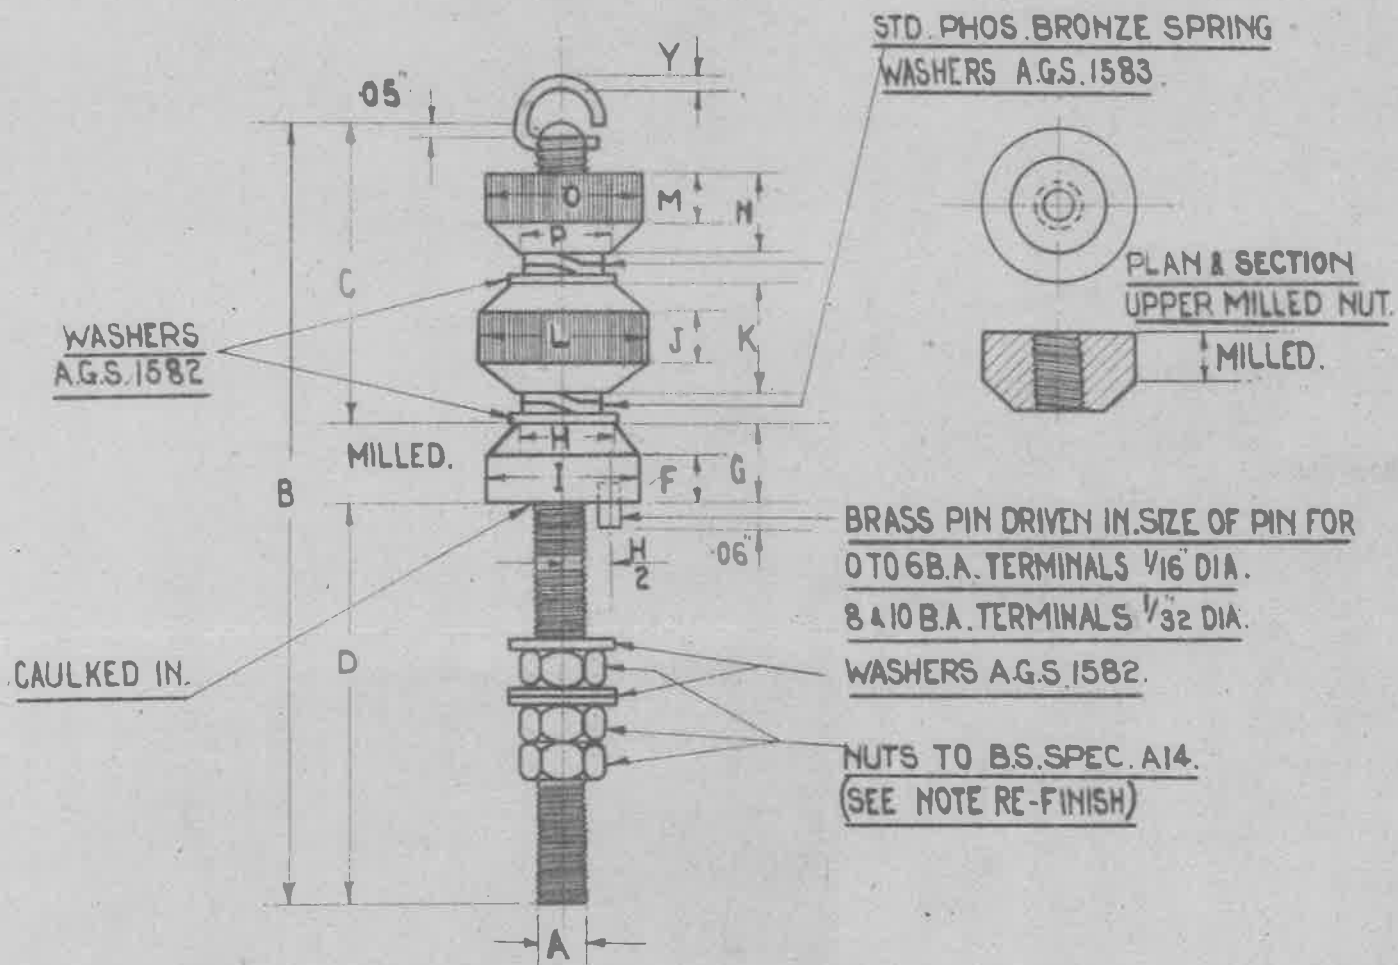


(P)

THIS SUPERSEDES A.G.S. 1708.

MINISTRY OF
AIRCRAFT
PRODUCTION.AGS. N^o 1760.SHEET N^o 1 N^o SHEETS 1

STORES REF. N ^o	SIZE B.A.	DIMENSIONS.										
		BODY.										LOWER MILLED NUT.
		A	B	C	D	F	G	H	I	J	K	L
5K/2704	1/4BSF	3.28	1.47	1.50	0.20	0.30	0.50	0.75	0.20	0.40	0.90	
5K/2705	2BA.	3.17	1.36	1.50	0.20	0.30	0.45	0.70	0.20	0.35	0.75	
5K/2706	4BA.	2.70	1.19	1.25	0.15	0.25	0.35	0.55	0.15	0.30	0.60	
5K/2707	6BA.	2.27	1.06	1.00	0.12	0.20	0.25	0.40	0.13	0.28	0.45	
5K/2708	8BA.	1.74	.86	0.75	0.09	0.125	0.20	0.25	0.10	0.15	0.28	
5K/2709	10B.A.	1.33	.72	0.50	0.05	0.10	0.15	0.20	0.05	0.10	0.22	

	UPPER MILLED NUT.					WASHER	SPRING WASHER	'D' RING	NUTS.
	A	M	N	O	P	AGS. N ^o	AGS. N ^o	Y	BS. SPEC. A14
5K/2704	1/4BSF	0.20	0.40	0.75	0.50	1582 - A	1583 - A	18SWG .048	EB
5K/2705	2BA.	0.20	0.35	0.70	0.45	1582 - B	1583 - B	18SWG .048	2B
5K/2706	4B.A.	0.15	0.30	0.55	0.35	1582 - C	1583 - C	20SWG. .036	4B
5K/2707	6B.A.	0.12	0.20	0.40	0.25	1582 - D	1583 - D	20SWG. .036	6B
5K/2708	8B.A.	0.08	0.14	0.25	0.20	1582 - E	1583 - E	22.SWG. .028	8B
5K/2709	10B.A.	0.05	0.08	0.20	0.15	1582 - F	1583 - F	24.SWG. .022	10B.

ALL THE ABOVE DIMENSIONS ARE IN INCHES AND A TOLERANCE OF ± 0.01 INCH WILL BE ALLOWED ALL THROUGH.

SCREW THREADS ARE TO BE IN ACCORDANCE WITH B.S. SPEC. N^o 93.

MATERIAL FOR TERMINAL :- BRASS.

MATERIAL FOR 'D' RING :- BRASS WIRE

FINISH:- ALL ITEMS EXCEPT SPRING WASHERS -A.G.S. 1583 ARE TO BE NICKEL PLATED TO AN AVERAGE THICKNESS OF .0002" & INSPECTED TO BS. SPEC. 1224.

ISSUED BY ROYAL AIRCRAFT ESTABLISHMENT.	TITLE: TERMINALS, INSTRUMENT (DOUBLE)				DRAWN	RE-TRACED J.HARRIS 29.6.48
	ISSUE N ^o	1				
	ALTER N ^o	MSB AGS/395				