


A.G.S. 2080

1	2	3	4
1	2	3	4
1	2	3	4
1	2	3	4

MAY BE SUPPLIED THUS

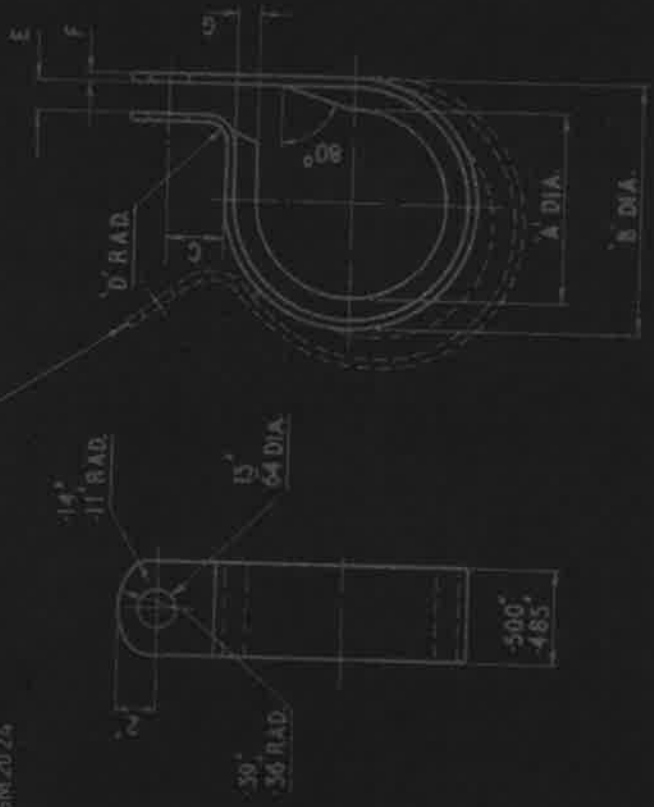

METHOD OF CALL UP :-

BASIC PART NUMBER. NOMINAL PIPE DIA. IN SIXTEENTH OF AN INCH. (MARK)

A.G.S. 2080 -- 7

MARK	DIA. A'	DIA. B'	C	D' RAD.	E	F	G
3	3/16	.589"	.25"	.05"	.05"	20 SWG	.06"
4	1/4	.652"	.25"	.05"	.09"	20 SWG	.06"
5	3/16	.554"	.25"	.05"	.12"	20 SWG	.08"
6	1/2	.617"	.25"	.05"	.12"	20 SWG	.08"
7	7/16	.670"	.25"	.05"	.12"	20 SWG	.08"
8	1/2	.742"	.25"	.05"	.12"	20 SWG	.08"
9	9/16	.878"	.30"	.10"	.15"	18 SWG	.10"
10	5/8	.941"	.30"	.10"	.15"	18 SWG	.10"
12	3/4	1.056"	.30"	.10"	.15"	18 SWG	.10"
14	7/8	1.191"	.30"	.10"	.15"	18 SWG	.10"
16	1	1.315"	.30"	.10"	.15"	18 SWG	.10"
18	1 1/8	1.441"	.30"	.10"	.15"	18 SWG	.10"
20	1 1/4	1.566"	.30"	.10"	.15"	16 SWG	.10"
22	1 3/8	1.691"	.30"	.10"	.15"	16 SWG	.10"

SUITABLE FOR CONTACT WITH FUEL OIL & SYNTHETIC LUBRICANTS, INCLUDING STRIP TO BE RED ANODISED AFTER RUBBERING.

HT	PT	SEE	RUBBER CODE	H X C
HT	PT	SEE	ALUMINUM ALLOY CLIP	H X C
HT	PT	SEE	PIPE CLIP RUBBER COVERED	H X C
HT	PT	SEE	FOR 3/16 DIA. FIXING	H X C

DESIGNED BY THE SOCIETY OF AUTOMOBILE ENGINEERS, INC. 25, KING STREET A.S. JAMES, LONDON, E.C.1.

