


A.G.S. 2081

1	2	3	4	5	6	7	8	9	10	12	14	16	18	20	22
1.315	1.625	1.935	2.245	2.555	2.865	3.175	3.485	3.795	4.105	4.715	5.325	5.935	6.545	7.155	7.765

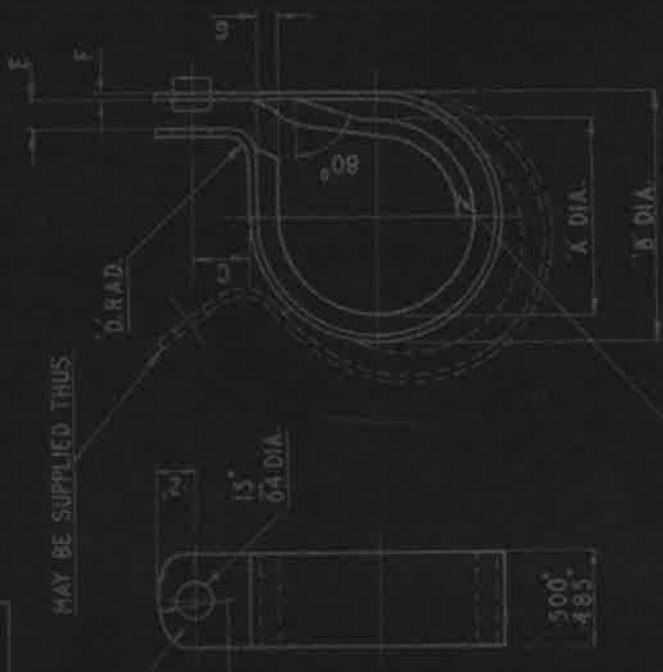

ELECTRICAL BONDING STRIP .010" OR .0124" THICK

METHOD OF CALL UP:-

BASIC PART NUMBER

NOMINAL PIPE DIA. IN SIXTEENTH OF AN INCH (MARK)

A.G.S. 2081-7

MARK	DIA. A	DIA. B	C	RAD. D	E	F	G
3	3/16	.389	.25	.05	.05	20 S.W.G.	.06
4	1/4	.452	.25	.05	.09	20 S.W.G.	.06
5	5/16	.554	.25	.05	.12	20 S.W.G.	.08
6	3/8	.617	.25	.05	.12	20 S.W.G.	.08
7	7/16	.679	.25	.05	.12	20 S.W.G.	.08
8	1/2	.742	.25	.05	.12	20 S.W.G.	.08
9	9/16	.878	.30	.10	.15	18 S.W.G.	.10
10	5/8	.941	.30	.10	.15	18 S.W.G.	.10
12	3/4	1.066	.30	.10	.15	18 S.W.G.	.10
14	7/8	1.191	.30	.10	.15	18 S.W.G.	.10
16	1	1.316	.30	.10	.15	18 S.W.G.	.10
18	1 1/8	1.441	.30	.10	.15	18 S.W.G.	.10
20	1 1/4	1.566	.30	.10	.15	18 S.W.G.	.10
22	1 3/8	1.691	.30	.10	.15	18 S.W.G.	.10

SUITABLE FOR CONTACT WITH FUEL OIL & SYNTHETIC LUBRICANTS, INCLUDING EEL STRIP TO BE RED ANODISED AFTER RUBBERING.

APPROXIMATE PART NO.	
RUBBER CODE	H X C
ALUM. ALLOY CLIP	L 72
DESCRIPTION	PIPE CLIP
PT. ABOVE	4 010
SEE ABOVE	
THIRD ANGLE PROJECTION	A.G.S. 2081

APPROXIMATE PART NO.	
RUBBER CODE	H X C
ALUM. ALLOY CLIP	L 72
DESCRIPTION	PIPE CLIP
PT. ABOVE	4 010
SEE ABOVE	
THIRD ANGLE PROJECTION	A.G.S. 2081

DESIGNED BY THE BUREAU OF AIRCRAFT ENGINEERING, CANBERRA, N.S.W.

18, 19th STREET, ST. LOUIS, MISSOURI, U.S.A.

