


A.G.S. 2085

1	1.51
2	1.82
3	2.13
4	2.44
5	2.75

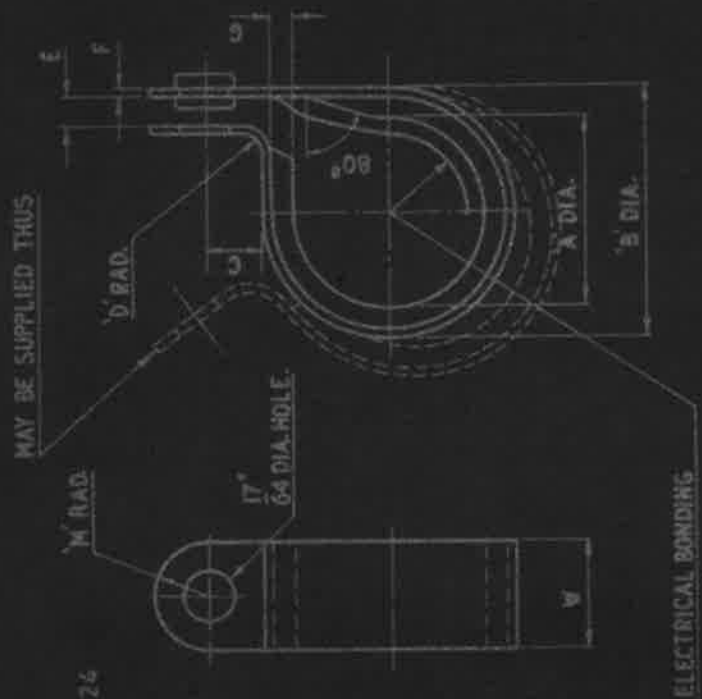

ELECTRICAL BONDING STRIP - 010" OR -0124" THICK.

METHOD OF CALL UP:-

BASIC PART NUMBER  
 A.G.S. 2085-7  
 NOMINAL PIPE DIA. IN SIXTEENTH OF AN INCH. (MARK)

\* MARKS 28, 30 & 32 ARE OBSOLETE AND ARE SUPERSEDED BY THE SAME MARK NUMBERS ON A.G.S. 3432.

DESIGNED BY THE SOCIETY OF BRITISH REFRIGERATION ENGINEERS LTD., 15, KING STREET, ST. MARTIN, LONDON, W.C.1.

MARK	DIA. A	DIA. B	C	D RAD.	E	F	G	M	W
3	380	-25	-05	20 SWG	-06	-06	-281		
4	452	-25	-05	20 SWG	-06	-06	-281		
5	554	-23	-05	20 SWG	-08	-08	-281		
6	617	-25	-05	20 SWG	-08	-08	-281		
7	679	-25	-05	20 SWG	-08	-08	-281		
8	742	-25	-05	20 SWG	-08	-08	-281		.662 .547
9	870	-30	-10	18 SWG	-10	-10	-281		
10	941	-30	-10	18 SWG	-10	-10	-281		
12	1066	-30	-10	18 SWG	-10	-10	-281		
14	1191	-30	-10	18 SWG	-10	-10	-281		
16	1316	-30	-10	18 SWG	-10	-10	-281		
18	1441	-30	-10	18 SWG	-10	-10	-312		
20	1566	-35	-10	16 SWG	-10	-10	-312		
22	1691	-35	-10	16 SWG	-10	-10	-312		.625 .605
24	1800	-35	-10	16 SWG	-12	-12	-312		
26	2020	-35	-10	16 SWG	-12	-12	-312		
28	2250	-40	-125	14 SWG	-15	-15	-375		.750
30	2355	-40	-125	14 SWG	-15	-15	-375		.750
32	2480	-40	-125	14 SWG	-15	-15	-375		

SUITABLE FOR CONTACT WITH FUEL, OIL & SYNTHETIC LUBRICANTS INCLUDING FEL. J. STRIP TO BE RED ANODISED AFTER RUBBERING.

RUBBER CODE	H X C
ALUMINUM ALLOY CLIP	L 72
UNFINISH OF PART	MATERIAL--ZEPHRA 4
PT	SEE ABOVE
HT	SEE ABOVE
THIRD ANGLE PROJECTION	A.G.S. 2085