


ISSUE	ALT. No.
1	
2	F.32
3	F.90

IT IS RECOMMENDED THAT THESE TAPES BE PURCHASED IN ROLLS OF 12 YDS. MINIMUM, THEREAFTER IN INCREMENTS OF 6 YDS. I.E. 12, 18, 24 YDS. ETC., WHEN ORDERING ROLLS OF TAPE IT WILL BE NECESSARY TO ORDER THE APPROPRIATE CLIPS SEPERATELY.

TAPE MUST BE ORDERED AS FOLLOWS: TAPE TO A.G.S. 2088/M.23 PART No./ THICKNESS (I.E. .003" OR .007" SR22) (THICK) E.G. 12 YDS. OF TAPE A.G.S. 2088/6/003.

THE M.A.M. RUBBER CO. LTD., CLAIM TO HAVE APPLIED FOR PATENTS IN 1958 ON THIS ITEM THOUGH THE SOCIETY TRIM HAS NOT INVESTIGATED THE CLAIM.

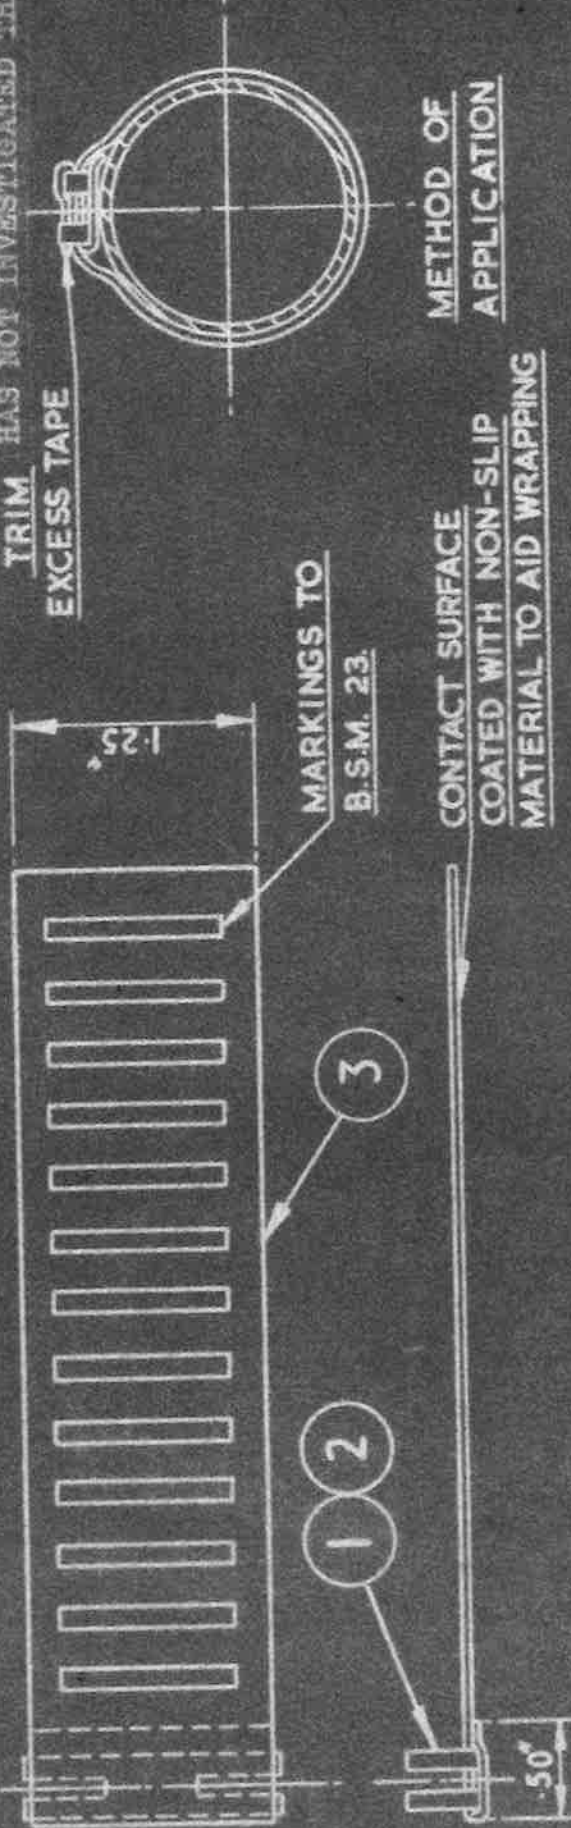

PROOF AGAINST FUELS, OILS & LUBRICANTS INCLUDING E.E.L.3 CAN BE USED UP TO 300°C.

THICKNESS OF TAPE	.003"																.007"			
DIA. OF PIPE	1/4	3/8	1/2	5/8	3/4	7/8	1	1 1/4	1 1/2	1 3/4	2	2 1/4	2 1/2	2 3/4	3'					
TAPE LENGTH IN 1/4 INCREMENTS	8	10	11	13	14	16	17	21	24	27	30	33	37	40	43					

METHOD OF CALLING UP:  
PART No./TAPE LENGTH IN 1/4 OF AN INCH./M.23 CODE No. I.E. TAPE TO SUIT 3/4 O/D. PIPE MARKED HYDRAULIC WILL BE A.G.S.2088/14/6.

CONTACT SURFACE COATED WITH NON-SLIP MATERIAL TO AID WRAPPING

REF.	DRAWING OR PART No.	DESCRIPTION	LIMITS NOT SHOWN
3		P.T.F.E. IMPREGNATED GLASS FABRIC TAPE	
2	A.G.S. 2114	CLIP FOR USE WITH .007" THICK TAPE	
1	A.G.S. 2089	CLIP FOR USE WITH .003" THICK TAPE	

DESIGNED	DRAWN	TRACED	CHECKED	APPROVED FOR	DATE
M.A.M. RUBBER Co	F.A.L.	F.A.L.	F.A.L.	S.B.A.C.	10-6-53

ISSUED BY THE SOCIETY OF BRITISH AIRCRAFT CONSTRUCTORS LTD.,  
29, KING STREET, ST. JAMES'S, LONDON, S.W.1.

THIRD ANGLE PROJECTION

A.G.S. 2088.

SIZE 5.5" x 7.5"