

IT IS RECOMMENDED THAT THESE TAPES BE PURCHASED IN ROLLS OF 12 YDS. MINIMUM, THEREAFTER IN INCREMENTS OF 6 YDS. I.E. 12, 18, 24 YDS. ETC.. WHEN ORDERING ROLLS OF TAPE IT WILL BE NECESSARY TO ORDER THE APPROPRIATE CLIPS SEPARATELY.

TAPE MUST BE ORDERED AS FOLLOWS: TAPE TO A.G.S. 2090/MARKINGS SPECIFIED/THICKNESS SPECIFIED (I.E. .003" OR .007" THICK) E.G. 12 YDS. OF TAPE TO A.G.S. 2090/MARKINGS SPECIFIED/003.


SR622



MARKINGS TO BE SPECIFIED ON DRAWINGS.

"THE M.A.M. RUBBER CO. LTD., CLAIM TO HAVE APPLIED FOR PATENTS IN 1958 ON THIS ITEM THOUGH THE SOCIETY HAS NOT INVESTIGATED THE CLAIM."

TRIM EXCESS TAPE

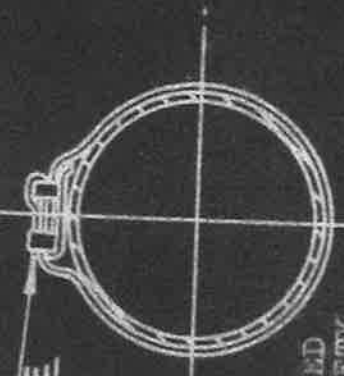

METHOD OF APPLICATION

CONTACT SURFACE COATED WITH NON-SLIP MATERIAL TO AID WRAPPING.

PROOF AGAINST FUELS, OILS & LUBRICANTS INCLUDING E.E.L. 3 CAN BE USED UP TO 300°C.

THICKNESS OF TAPE	.007"													
DIA. OF PIPE	1/4	3/8	1/2	5/8	3/4	7/8	1 1/8	1 1/4	1 1/2	1 3/4	2	2 1/4	2 1/2	3"
TAPE LENGTH IN 1/4 INCREMENTS	8	10	11	13	14	16	17	21	24	27	30	33	37	40 43

METHOD OF CALLING UP: PART No./TAPE LENGTH IN 1/4 OF AN INCH I.E. TAPE TO SUIT 3/4" PIPE WILL BE A.G.S. 2090/14.

REF.	DRAWING OR PART No.	DESCRIPTION
3		PTFE. IMPREGNATED GLASS FABRIC TAPE
2	A.G.S. 2115	CLIP FOR USE WITH .007" THICK TAPE
1	A.G.S. 2091	CLIP FOR USE WITH .003" THICK TAPE

DESIGNED	DRAWN	TRACED	CHECKED	APPROVED FOR	DATE
M. J. M. RUBBER CO.	F. A. L.	F. A. L.	F. A. L.	<i>Y. H. G. S. Ltd</i>	11-6-59

ISSUED BY THE SOCIETY OF BRITISH AIRCRAFT CONSTRUCTORS LTD., 29, KING STREET, ST. JAMES'S, LONDON, S.W.1.

ISSUE	ALT. No.	MATERIAL - REMARKS
1		
2	F.32	
3	F.90	

THIRD ANGLE PROJECTION

PIPE IDENTIFICATION BAND FOR USE IN HOT ZONES 1.0" WIDE.

A.G.S. 2090.