



AGS 3049

REV	DATE	BY	CHKD
1			
2	1-14-57		
3	1-11-58		
4	1-11-58		

SM 2026

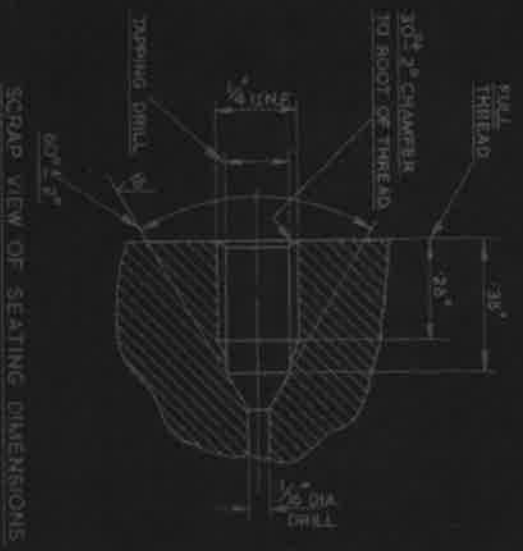

SECTION A-A

APPROVED WORKING PRESSURE 1000 LB/SQ IN  
 UN. THREADS TO BE IN ACCORDANCE WITH U.S. SPEC. 1582  
 EXTERNAL THREADS - CLASS 2A FIT  
 INTERNAL THREADS - CLASS 2B FIT  
 HEAT TREATMENT - QUENCH HARDEN - 670°C FOR 30 MINUTES,  
 QUENCH DIRECT IN WATER DEPTH OF CASE 0.02" - 0.02"

STEEL	INCHES	± 0.01	THIRD ANGLE PROJECTION
STEEL	INCHES	± 0.01	THIRD ANGLE PROJECTION

HIT AS ABOVE

DESIGNED BY THE DIVISION OF ENGINEERING, CONTRACT CONSULTANTS, LTD.  
 15 KING STREET, TRAFALGAR SQUARE, LONDON, W.1.

DESIGNED BY THE DIVISION OF ENGINEERING, CONTRACT CONSULTANTS, LTD.  
 15 KING STREET, TRAFALGAR SQUARE, LONDON, W.1.

AGS 3049