


MAY BE SUPPLIED THUS

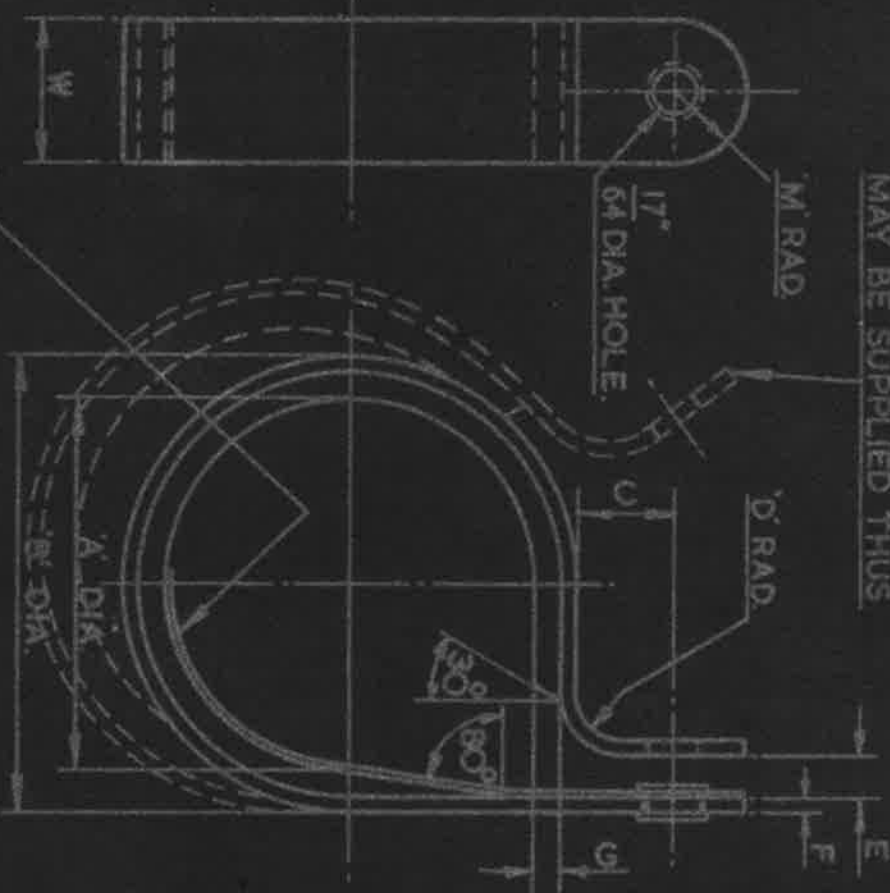

ELECTRICAL BONDING STRIP .012" THICK

THIS DRG. SUPERSEDES MARKS 28-30-32 ON A.G.S. 2083.

S M 2024 2 F120

MARK	NOM. PIPE DIA. A.	B DIA.	C	D RAD.	E	F	G	M RAD.	W
28	1 3/4"	2.230"	.50"	.250"	.22"	14 SWG.	.15"	.375"	
30	1 7/8"	2.355"	.50"	.250"	.22"	14 SWG.	.15"	.375"	.750"
32	2"	2.480"	.50"	.250"	.22"	14 SWG.	.15"	.375"	.730"

METHOD OF CALL UP

BASIC PART NUMBER

NOMINAL PIPE DIA. IN SIXTEENTH OF AN INCH. (MARK)

A.G.S. 3432 - 30.

SUITABLE FOR CONTACT WITH FUEL, OIL & SYNTHETIC LUBRICANTS, INCLUDING EEL.3.  
STRIP TO BE RED ANODISED AFTER RUBBERING.

REF.	DRAWING OR PART NO.	DESCRIPTION	RUBBER CODE	ALUMM. ALLOY CLIP	HXC

DESIGNED	DRAWN	TRACED	CHECKED	APPROVED FOR	DATE
DUNLOP	F.A.L.	F.A.L.	F.A.L.	<i>[Signature]</i>	24.4.63

ISSUED BY THE SOCIETY OF BRITISH AEROSPACE COMPANIES LTD.,  
19, KING STREET, ST. JAMES'S, LONDON, S.W.1.

HT	PT	AS ABOVE	SCALE	LIMITS NOT SHOWN	± .010"	THIRD ANGLE PROJECTION.

PIPE CLIP RUBBER COVERED FOR 1/4" DIA. FIXING WITH EARTHING TONGUE (FOR PIPES 1 3/4" DIA. & OVER)  
A.G.S. 3432.