
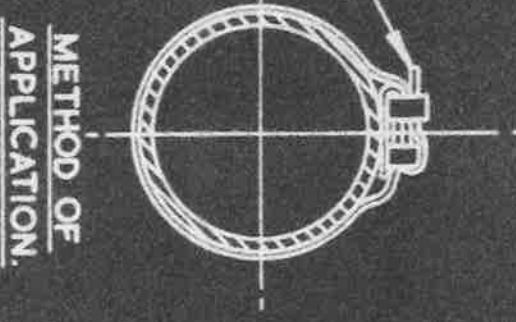


IT IS RECOMMENDED THAT THESE TAPES BE PURCHASED IN ROLLS OF 12 YDS. MINIMUM, THEREAFTER IN INCREMENTS OF 6YDS. I.E. 12,18,24YDS. ETC. WHEN ORDERING ROLLS OF TAPE IT WILL BE NECESSARY TO ORDER SR 62Z THE APPROPRIATE CLIPS SEPARATELY.  
 TAPE MUST BE ORDERED AS FOLLOWS: TAPE TO AGS. 3442/ THICKNESS (I.E. .003 OR .007 THICK) E.G. 12YDS. OF TAPE TO AGS. 3442/003.

ISSUE	1
ALT. No.	

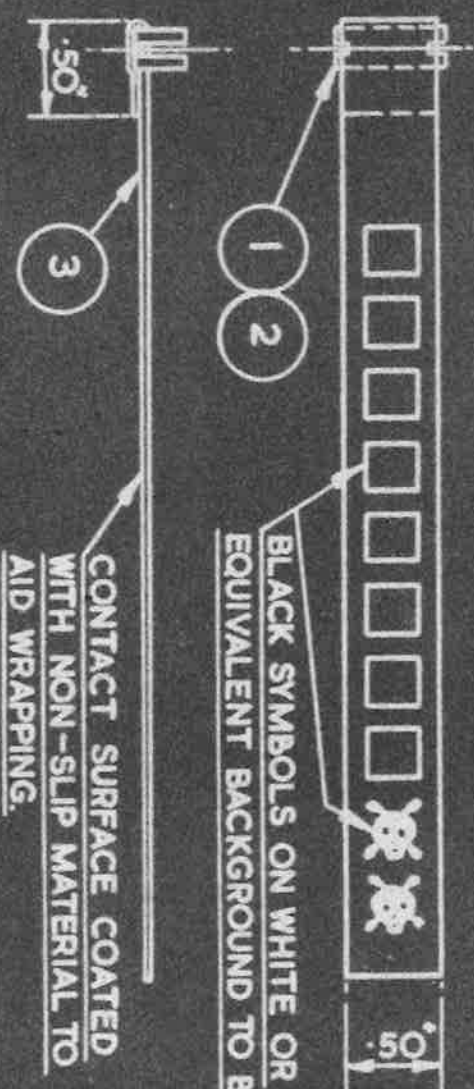

PROOF AGAINST FUELS, OILS & LUBRICANTS INCLUDING E.E.L.3. CAN BE USED UP TO 300°C.

METHOD OF CALLING UP:  
 PART No./TAPE LENGTH IN 1/4 OF AN INCH I.E. TAPE TO SUIT 1/2 O.D. PIPE WILL BE A.G.S. 3442/11.

THICKNESS OF TAPE	.003												.007																										
DIAMETER OF PIPE	1/4	3/8	1/2	5/8	3/4	7/8	1	1 1/4	1 1/2	1 3/4	2	2 1/4	2 1/2	2 3/4	3																								
TAPE LENGTH IN 1/4 INCREMENTS	8	10	11	13	14	16	17	21	24	27	30	33	37	40	43																								

SEE AGS.100 FOR GENERAL INFORMATION.

REF.	3	2	1	
DRAWING OR PART No.	AGS. 2117	AGS. 2095	AGS. 2095	
DESCRIPTION	STEEL IMPREGNATED GLASS FABRIC TAPE CLIP FOR USE WITH .007 THICK TAPE.	CLIP FOR USE WITH .007 THICK TAPE.	CLIP FOR USE WITH .003 THICK TAPE.	
LIMITS NOT SHOWN				
AS DRAWN UNIT				
OR HAND UNIT				
MATERIAL - REMARKS				

DESIGNED	DRAWN	TRACED	CHECKED	APPROVED FOR	DATE
	F.A.L.	F.A.L.	F.A.L.	<i>Substant</i>	29.11.63

ISSUED BY THE SOCIETY OF BRITISH AIRCRAFT CONSTRUCTORS LTD.,  
 29, KING STREET, ST. JAMES'S, LONDON, S.W.1.

HT PT NONE SCALE LIMITS NOT SHOWN  
 PIPE WARNING SYMBOL BANDS FOR USE IN HOT ZONES. 1/2" WIDE.

THIRD ANGLE PROJECTION.

A.G.S. 3442.