




2.9.29  
F S WIGLEY

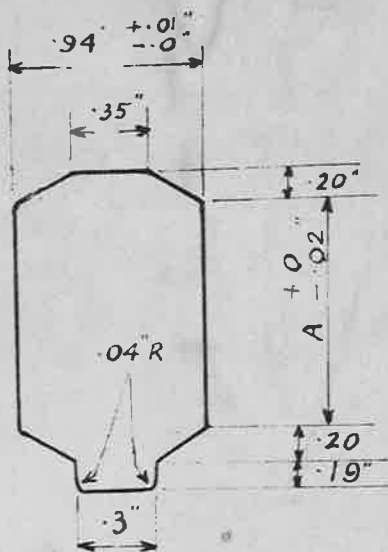

28 SWG. (.014")

*For Bowden Eff  
SP364.*

MARK	SIZE OF TIE ROD (SWAGED)	A
1	4 BA	.38"
2	2 BA	.45"
3	7/32 BSF	.52"
4	1/4 "	.59"
5	9/32 "	.71"
6	5/16 "	.76"
7	11/32 "	.85"
8	3/8 "	.92"
9	13/32 "	1.02"
10	7/16 "	1.09"
11	15/32 "	1.19"
12	1/2 "	1.26"
13	9/16 "	1.40"
14	5/8 "	1.54"
15	11/16 "	1.74"
16	3/4 "	1.87"
17	7/8 "	2.22"
18	1 "	2.57"
19	1 1/8 "	2.90"
20	1 1/4 "	3.28"

SPECIFICATION:-

THE MATERIAL TO BE STEEL SHEET TO DTD SPECIFICATION 39 OR COPPER ALLOY TO DTD SPECIFICATION 10.

NOTE - TABS TO BE ANNEALED WHEN MADE OF COPPER ALLOY

NO SOLDER OF ANY KIND IS TO BE USED EITHER TO SECURE THE TABS THEMSELVES, OR THE TABS TO THE WIRES.

ISSUED BY DRAWING OFFICE DIRECTORATE OF TECHNICAL DEVELOPMENT AIR MINISTRY	TITLE— IDENTIFICATION TABS FOR TIE RODS (SWAGED)				RETRACED FOR A.P.C. MCL ES DEPT.	DRAWN <i>H. G. ...</i>	TRACED <i>J. H. ...</i> 24.6.30
	ISSUE No.	1				CHECKED <i>M. ...</i>	APPROVED <i>(Signature)</i>
	ALTERATION	MOP: Aug/201					