


TAPE TO B.S. SPEC: 419
 TO OVERLAP CLIP.

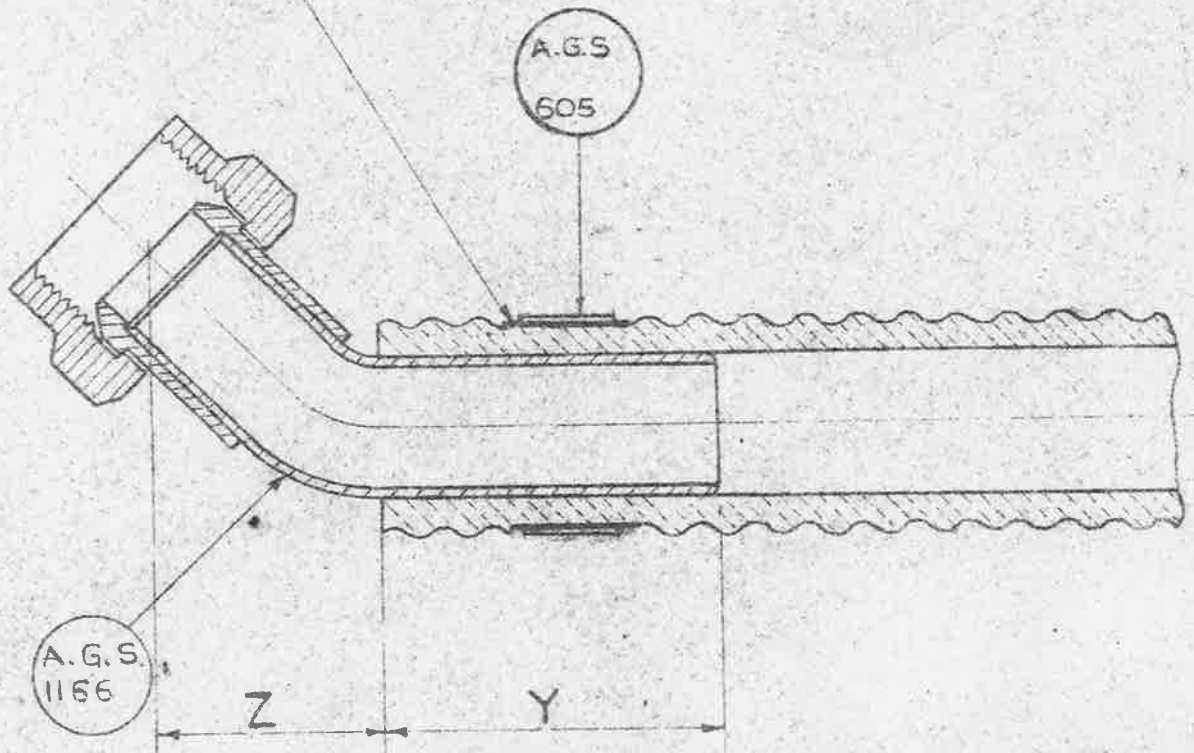

| BORE OF FLEXATEX HOSE | 45° NIPPLE ELBOW A.G.S. 1166 MARK | CLIP A.G.S. 605 MARK | DIMENSIONS | |
|-----------------------|-----------------------------------|----------------------|------------|-------------|
| | | | Y | Z (APPROX.) |
| 1/4" | B | 0 | 1.25" | 1/2" |
| 3/8" | C | 0 | 1.75" | 23/32" |
| 1/2" | D | 1 | 1.75" | 11/32" |
| 5/8" | E | 1 | 1.75" | 1/8" |
| 3/4" | F | 1 | 1.75" | 17/32" |
| 7/8" | G | 1 | 1.75" | 1 1/16" |
| 1" | H | 1 | 1.75" | 1 13/16" |
| 1 1/4" | J | 2 | 2.00" | 2" |
| 1 1/2" | K | 2 | 2.00" | 2 3/8" |

NOTES: DIMENSION Z IS GIVEN FOR INFORMATION ONLY TO ENABLE ACTUAL LENGTH OF FLEXATEX HOSE, REQUIRED TO BE ASCERTAINED HOSE TO BE FITTED TO ELBOW IN ACCORDANCE WITH S.I.S. No 57 (LATEST ISSUE)

| | | | | |
|---|--|-----------------|------------------------|-----------------------------|
| ISSUED BY THE ROYAL AIRCRAFT ESTABLISHMENT. | TITLE: END CONNECTION (45° ELBOW) FOR FLEXATEX FUEL HOSE GENERAL ARRANGEMENT | | DRAWN C.T. Reynolds | TRACED B.E.W. 24.6.43 |
| | ISSUE No | 2 | CHECKED FROM SAE DR | APPROVED |
| | ALTERATION No | AgS/507 AgS/338 | | 10.7.43 |