


7-5-29  
F. S. WIGLEY

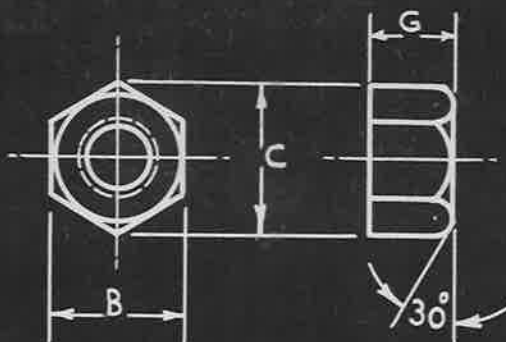

NOMINAL SIZE	PART N°	"B" WIDTH ACROSS FLATS		"C" WIDTH ACROSS CORNERS	THICKNESS "G"	
		MIN. IN.	MAX. IN.	APPROX. MAX.	MIN. IN.	MAX. IN.
0 B.A.	1581 A	.410	.413	.477	.226	.236
1 B.A.	1581 Y	.410	.413	.477	.200	.210
2 B.A.	1581 B	.321	.324	.374	.175	.185
4 B.A.	1581 C	.245	.248	.286	.132	.142
6 B.A.	1581 D	.190	.193	.223	.105	.110
8 B.A.	1581 E	.150	.152	.175	.082	.087
10 B.A.	1581 F	.115	.117	.135	.062	.067

SPECIFICATION:- THE MATERIAL TO BE BRASS, BEST COMMERCIAL QUALITY,

BRITISH STANDARD SPECIFICATION BS 2875 (LATEST ISSUE)

SCREW THREADS:- BRITISH ASSOCIATION (B.A.) TO B.S. SPECN N° 93.

ALTERATION N° 100  
A.G.S. 100  
16-8-27 A.A.M.  
150  
18-7-28 A.A.M.

ISSUED BY DRAWING OFFICE  
DIRECTORITE OF  
TECHNICAL DEVELOPMENT.  
**AIR MINISTRY**

TITLE: **B.A. NUTS.**

ISSUE N°	4	5	6
ALTERATION N°	D.C.S. A.G.S./35 7-8-28 A.A.M.	A.S. A.G.S./128	A.S. N° A.G.S./221 25-9-40

DRAWN H. MILLAR.	RE-TRACED J.M. STALLARD 23-12-38
CHECKED L.R. ELLIS 30/10/28 RE-CH. J. MILLS R. B. BASTABLE V.P.L.	APPROVED G.W. 7-5-29.