


IT IS RECOMMENDED THAT THESE TAPES BE PURCHASED IN ROLLS OF 12 YDS. MINIMUM, THEREAFTER IN INCREMENTS OF 6 YDS. I.E. 12, 18, 24 YDS. ETC., WHEN ORDERING ROLLS OF TAPE IT WILL BE NECESSARY TO ORDER THE APPROPRIATE CLIPS SEPERATELY.

TAPE MUST BE ORDERED AS FOLLOWS: TAPE TO A.G.S. 2094/ THICKNESS (I.E. .003" OR .007" THICK) E.G. 12 YDS. OF TAPE TO A.G.S. 2094/003.

THE M.A.M. RUBBER CO. LTD., CLAIM TO HAVE APPLIED FOR PATENTS IN 1958 ON THIS ITEM THOUGH THE SOCIETY HAS NOT INVESTIGATED THE CLAIM. TRIM

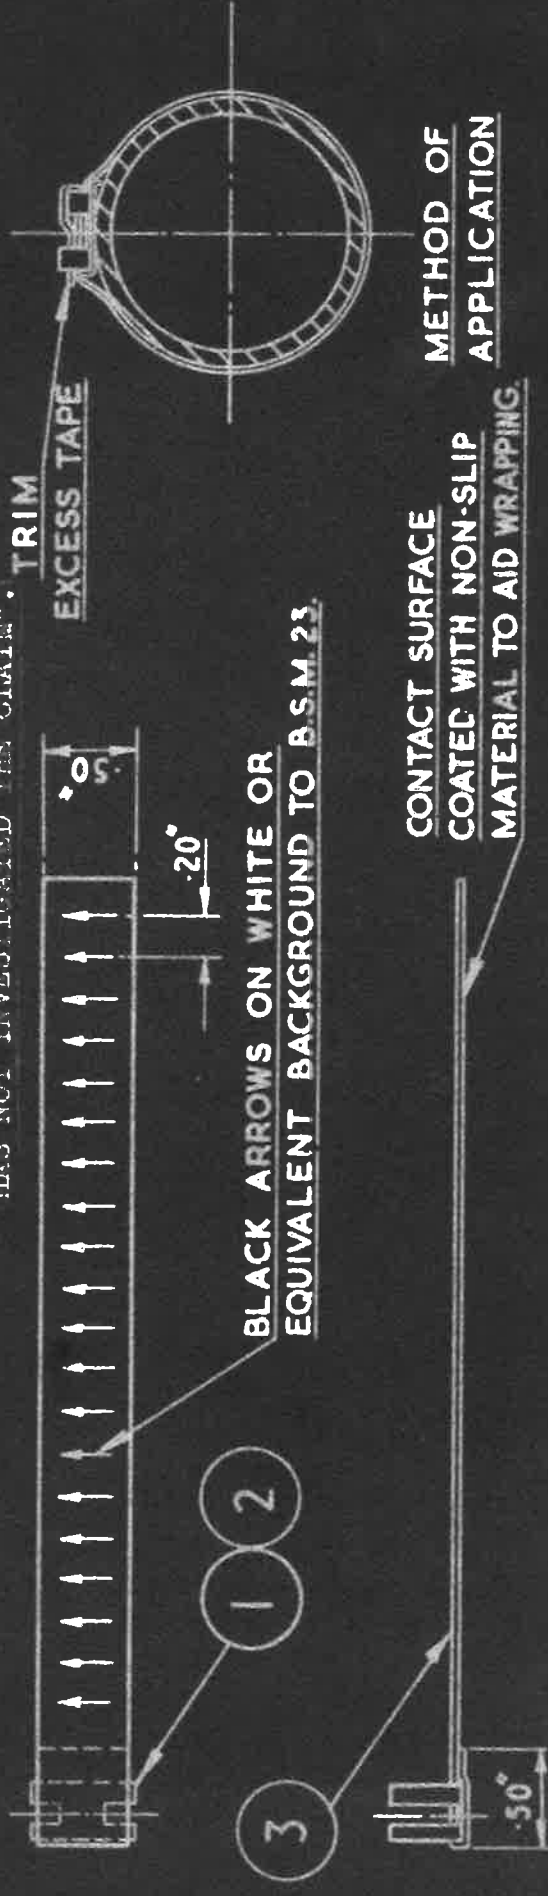

PROOF AGAINST FUELS, OILS & LUBRICANTS INCLUDING E.E.L. 3 CAN BE USED UP TO 300°C.

THICKNESS OF TAPE	.007"													
DIAMETER OF PIPE	1/4	3/8	1/2	5/8	3/4	7/8	1	1 1/4	1 1/2	1 3/4	2	2 1/4	2 1/2	3'
TAPE LENGTH IN 1/4 INCREMENTS	8	10	11	13	14	16	17	21	24	27	30	33	37	40 43

METHOD OF CALLING UP:  
PART No./ TAPE LENGTH IN 1/4 OF AN INCH I.E.  
TAPE TO SUIT 3/4 O/DIA. PIPE WILL BE A.G.S. 2094/14.

REF.	DRAWING OR PART No.	DESCRIPTION	AS DRAWN	OR HAND	UNIT	QTY
3		P.T.F.E. IMPREGNATED GLASS FABRIC TAPE				
2	A.G.S. 2117	CLIP FOR USE WITH .007" THICK TAPE				
1	A.G.S. 2095	CLIP FOR USE WITH .003" THICK TAPE				

DESIGNED	DRAWN	TRACED	CHECKED	APPROVED FOR	DATE
M.A.M. RUBBER CO.	F.A.L.	F.A.L.	F.A.L.	<i>[Signature]</i>	18-6-50

ISSUED BY THE SOCIETY OF BRITISH AIRCRAFT CONSTRUCTORS LTD.,  
29, KING STREET, ST. JAMES'S, LONDON, S.W.1.

HT	PT	NONE	SCALE	LIMITS NOT SHOWN	THIRD ANGLE PROJECTION

A.G.S. 2094.

ISSUE	ALT. No.
1	
2	F.32
3	F.90.

SR522