


NOTE:-

THIS PULLEY IS ONLY TO BE USED WHERE A PLAIN BEARING PULLEY IS REQUIRED AS A SUBSTITUTE FOR SKFKO BALL BEARING PULLEY NO 400021 B. WITH WHICH IT IS DIMENSIONALLY INTERCHANGEABLE. FOR NEW DESIGNS USE S.B.A.C STANDARD PULLEYS

MINISTRY OF DEFENCE PRODUCTION
 AGS. No 976
 SHEET No 1 NO OF SHEETS 1

7710.14
 No. 402.58

NOTE:- BORE IN PLASTIC PULLEY TO BE MOULDED TO $.500 \pm .003$ DIA.

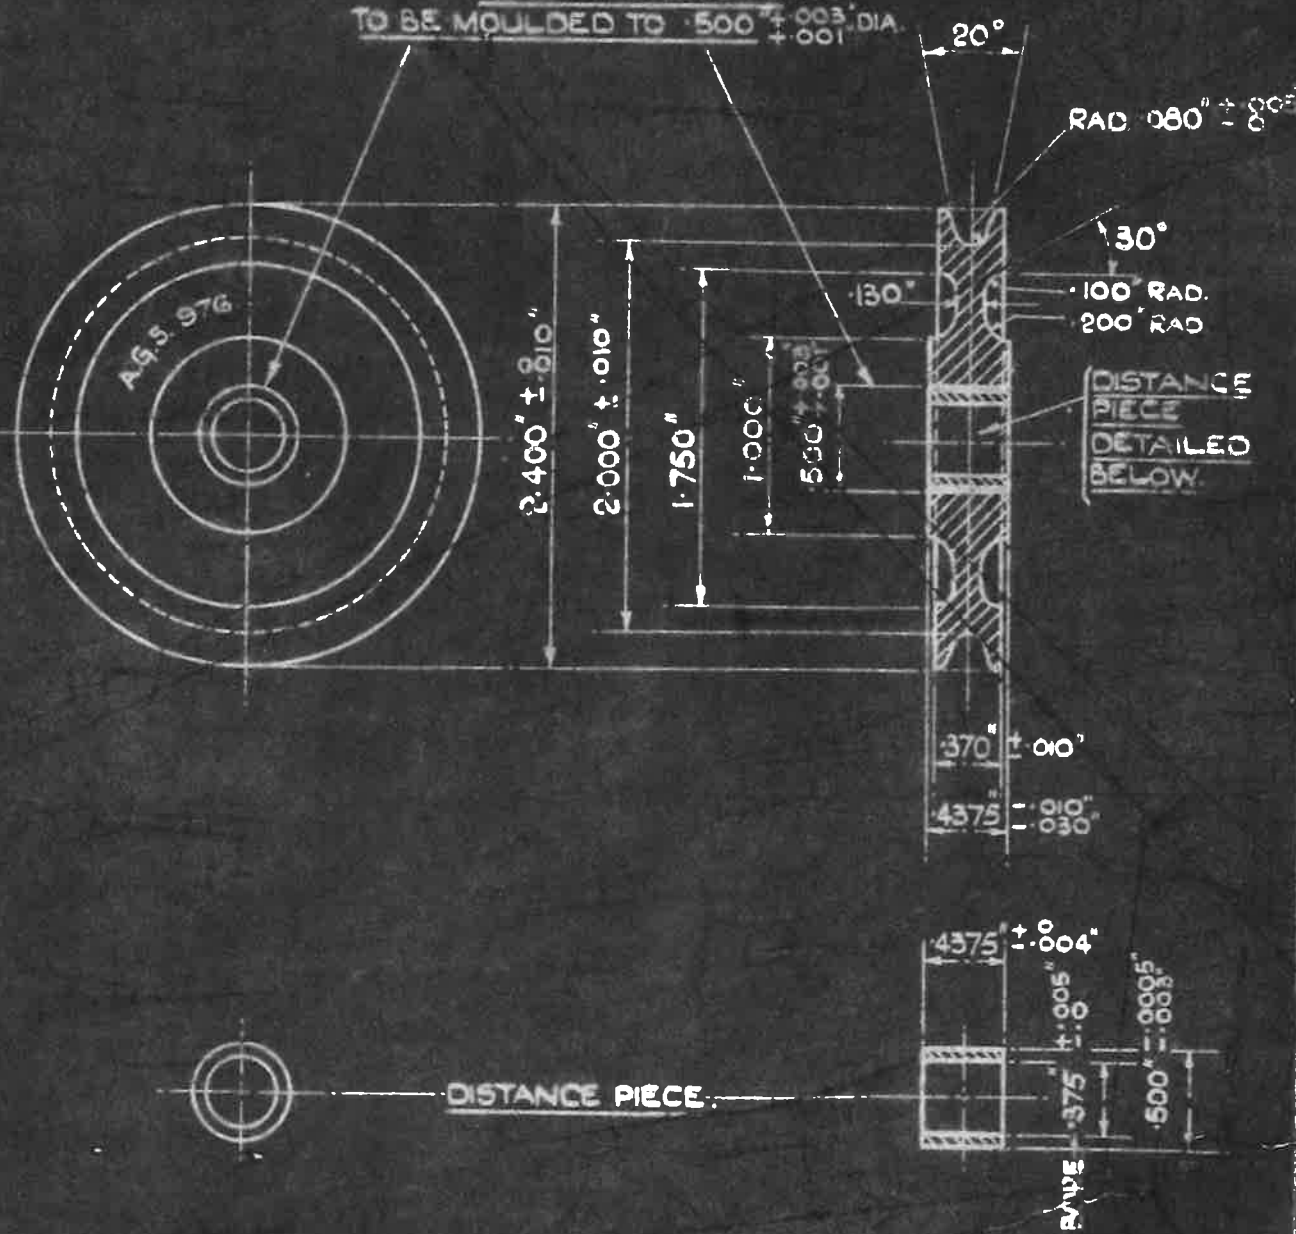

MATERIAL:-

PULLEY:- MOULDED BAKELISED FABRIC X 199 NATURAL.
 OR~
 NON-METALLIC SYNTHETIC RESIN MOULDED MATERIAL TO B.S.S. 972. GRADE A.
 REINFORCED CHOPPED FABRIC CORE
 SURFACED WITH FULL FABRIC.

DISTANCE PIECE:- STEEL. S1. S6 OR B.S.S. 32 GRADE 1

(LATEST ISSUE OF EACH SPECIFICATION)

ISSUED BY DRAWING OFFICE DIRECTORATE OF TECHNICAL DEVELOPMENT	TITLE - PULLEY, PLASTIC (3/8" BORE, PLAIN BEARING)				DRAWN S.P.C. / M. GHATA 25.7.42	TRACED 27.7.42
	ISSUE NO	1				
	ALTERN N2					